



Metering Pump Controller



The MPC, Metering Pump Controller, expands the flow range capability of the PULSAR , Pulsar HypoPump , Shadow, Shadow HypoPump , Series M, and Series M Model LI pumps. The MPC is a speed based control system for automatic control with an analog input signal and manual control either at the pump or up to 1000 feet (304 meters) from the pump with the MPC's exclusive handheld keypad.

KEY FEATURES:

- Detachable handheld keypad with 6 feet (1.8 m) of cable as standard
- Handheld keypad can be mounted up to 1000 feet (304 m) from pump
- 1000:1 Turndown for wide range of flow
- Motor on/off control on the handheld keypad with high visibility red button
- UL and CSA Approval pending, CE Approved
- Uses a commercially available inverter rated motor
- Displays pump output in units of flow (GPH or LPH)*
- NEMA 4X (IP56) rating on both pump mounted and handheld keypad enclosures
- Stroke length indication on the controller display*
- Automatic re-calibration of the pump curve with manual changes in stroke length*
- Security code to lock out unauthorized users
- Designed with safety and ergonomics in mind



*Not standard on Series M or Series M-Model LI - available as an option on Series M


Feature Performance Comparison:

Feature	MPC	Competition	DC Drive	AC Drive	Vector
NEMA 4X Enclosure (minimum IP56)	X		X	X	X
Typical Turndown	1000:1	90:1	20:1	10:1	100:1
CSA Approval and UL Approval pending	X		Optional	Optional	Optional
On Board Pump and Process System Diagnostics	X	X			
Simple Flow & Signal Calibration Routine	X	X			
Keypad with Liquid Crystal Display	X	X		X	X
Single Function Auto/Manual Switch	X		X	X	X
Motor ON/OFF Control at Pump	X	X			
Memory of Settings	X	X		X	X
Alarm Outputs	X	X		Optional	Optional
Uses a Motor Requiring No Maintenance	X	X		X	X
Factory Calibration of Flow w/ Flow Indication at Pump	X	X			
Auto Re-Calibration of Flow if Manual Stroke Length Control Changes	X				
CE Mark Standard	X	X	Optional	Optional	Optional
Modular for Field Convert from Pump Mount to Wall Mount Controls	X				

Technical Specifications:

Power Input Options	Single Phase, 115 or 230VAC (50 or 60 hz)
Analog Input/Output	One of each, Range is 4-20mA
Digital Inputs	(Two) Non-powered dry contacts - User configurable
Digital Outputs	(Three) Non-powered dry contacts - User configurable
Rated Ambient Temperature	0 - 40°C (High temperature option available to 50°C)
Steady State Accuracy	±1% over a 3:1 speed turndown added to the Steady State Accuracy of the pump ±2% over a 1000:1 speed turndown added to the Steady State Accuracy of the pump

Typical Dimensions: All Pulsar Series

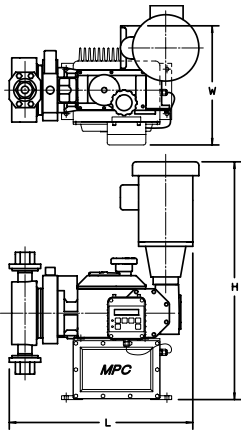


DIM	MODEL 25		MODEL 55	
	INCH	MM	INCH	MM
L	21.3	542.1	22.0	559.8
W	12.8	325.1	12.8	325.1
H	33.5	851.3	33.5	851.3
APPROX SHIP WT.	146LBS	66.2Kg	161LBS	73Kg



The MPC Handheld has remote capabilities of up to 1000 feet (304m) and can be mounted in safe and easily accessible environments. The backlit display allows for easy reading and can be programmed for english or metric measurements. Flow is indicated in relation to the pump and manual calculations are no longer required.

Typical Dimensions: Model LI

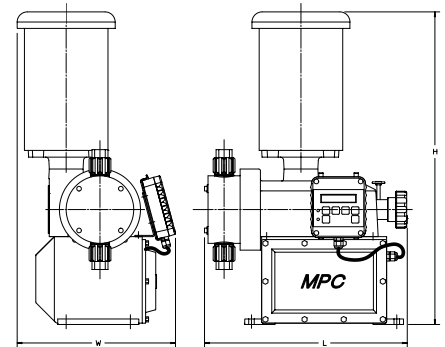

	L	H	W	WEIGHT
INCHES	15.50	23.50	12.00	66 LBS.
CENTIMETERS	39.37	59.69	30.48	30 KGS

PULSAFEEDER
A Unit of IDEX Corporation



Engineered Pump Operations
2883 Brighton-Henrietta Town Line Road
Rochester, New York 14623 USA
Telephone: 585-292-8000
Fax: 585-424-5619
<http://www.pulsa.com> - Email: pulsa@idexcorp.com



MPC-TS 06/04